10326
Outdoor Pallet

VIZINEX RFID
exactly the tag you need

Part Number
▸ CST1-195-0001

Industries
▸ Manufacturing
▸ Logistics
▸ Warehousing

Applications
▸ Yard management
▸ Reusable container management
▸ Warehouse management
▸ Asset Management

Why Vizinex?
▸ RFID engineering
▸ Innovative design
▸ High performance
▸ US-based support

The 10326 Outdoor Pallet is a waterproof RFID tag for tracking non-metal containers and assets in outdoor environments.

❯ 10326 Outdoor Pallet Tag Overview

When you need to locate bins or pallets of material in your warehouse, manufacturing floor or yard, the 10326 tag from Vizinex is your solution. Providing 6m (19.7') of read range in a low-profile, tough package at an aggressive price, the 10326 Outdoor Pallet tag is the ideal partner for your RFID data gathering system. You can mount the tag with the provided adhesive or with screws. For a modest additional charge, the tags can be labeled with barcode or human readable information so that the assets can be easily identified when an RFID reader is not available.
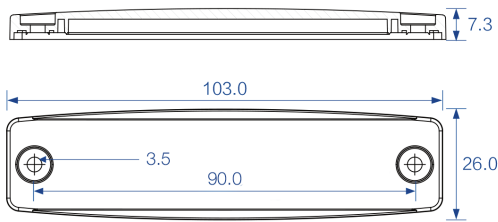
❯ Features & Benefits

- IP67 rated, suitable for both indoor and outdoor use
- Excellent read range of 6m (19.7') mounted on wood or plastic
- Durable and robust ABS shell
- Dual mounting methods: Peel-and-stick adhesive (provided) or screws (M4 or 5/32")
- Low cost

Vizinex Large Asset Tracking Solutions

The 10326 Outdoor Pallet tag is one of several tags offered by Vizinex to help the users of pallets, reusable containers and custom transport packaging better manage these valuable assets and the material they contain. The Sentry Midrange, for mount on metal applications, is a very rugged tag that provides 7.5m (25') of read range in a remarkably small footprint. The 10325 Indoor Pallet tag offers 5.5m (18') of read range for pallets and containers used indoors for a remarkably economical price. The XLR tag provides multi-surface capability, excellent durability and a read range of up to 24m (80'). Vizinex has a tag to solve a wide range of warehouse, yard and factory material tracking problems.

The 10326 Outdoor Pallet Tag Specifications

Physical	
Dimensions	103mm x 26mm x 7.3mm (4.06" x 1.02" x 0.29")
Use Case	Non-metal
Attachment	Peel-and-stick adhesive (supplied) or screws (M4 or 5/32")
Weight	14 grams
Electrical/RF	
Typical Read Range	6m (19.7')
Frequency	860-960 MHz
IC Platform	Impinj Monza R6; Impinj Monza R6-P
IC Memory	EPC up to 128 bits, 48-bit TID and up to 32 bits of user memory
Environmental	
Classification	IP67
Operating Temperature	-20° C to 60° C (-4° F to 140° F)
Temperature Tolerance	-20° C to 60° C (-4° F to 140° F)

7.3

103.0

3.5

90.0

26.0