

# 10325

## Indoor Pallet

### Part Number

- ▶ CST1-196-0001

### Industries

- ▶ Logistics
- ▶ Warehouse
- ▶ Manufacturing

### Applications

- ▶ Pallet & RTI tracking
- ▶ WIP Tracking

### Why Vizinex?

- ▶ RFID engineering
- ▶ Innovative design
- ▶ High performance
- ▶ US-based support



The 10325 Indoor Pallet tag is a low-cost RFID pallet tag for logistics, warehouse and RTI tracking applications.

### ▶ 10325 Tag Overview

The 10325 Indoor Pallet tag is ideal for tracking material in containers or on pallets in warehouses, stockrooms and other indoor environments. It offers durable, reliable performance, up to 5.5 meters (18 feet) of read range, at a remarkably low cost. It is a perfect fit for warehouse, supply chain and logistics applications.

The tag is easy to install and can be mounted with screws or with the supplied peel-and-stick adhesive. It can also be labeled with a barcode and/or human readable numbers for easy identification when an RFID reader is not available.


### ▶ Features & Benefits

- Read range up to 5.5m (18')
- Small form factor and durable shell
- 2x mounting methods: using the provided adhesive or screws
- Very low cost

### Can't find a standard tag that meets your needs?

Vizinex custom RFID tags will fit your dimensional, material, environmental and/or functional requirements EXACTLY – because we design them that way. And we do it with your business process and costs in mind.

Email [sales@vizinexrfid.com](mailto:sales@vizinexrfid.com) or call 215-529-9440 to talk about your needs and requirements.

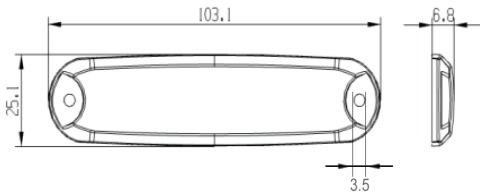

### › Vizinex Large Asset Tracking Solutions

The 10325 Indoor Pallet tag is one of several tags offered by Vizinex to help the users of pallets, reusable containers and custom transport packaging better manage these valuable assets and the material they contain. The Sentry Midrange, for mount on metal applications, is a very rugged tag that provides 7.5m (25') of read range in a remarkably small footprint. The 10326 Outdoor Pallet tag offers 6m (20') of read range for non-metal containers exposed to both indoor and outdoor conditions. The XLR tag provides multi-surface capability, excellent durability and a read range of up to 24m (80'). Vizinex has a tag to solve a wide range of warehouse, yard and factory material tracking problems.

### › The 10325 Indoor Pallet Tag Specifications

| Physical              |  |
|-----------------------|--|
| Dimensions            | 103mm x 25mm x 6.8mm<br>(4.1" x 1" x 0.3")                                 |
| Use Case              | Non-metal  |
| Attachment            | Peel-and-stick adhesive (supplied) or screw attachment (M4 or 5/32 screws) |
| Weight                | 16.7g  |
| Electrical/RF         |  |
| Typical Read Range    | 5.5m (18')   |
| Frequency             | 860-960 MHz  |
| IC Platform           | Alien Higgs 3  |
| IC Memory             | EPC up to 96 bits, 96-bit TID and up to 512 bits of user memory            |
| Environmental         |  |
| Classification        | IP54   |
| Operating Temperature | -20° C to 60° C (-4° F to 140° F)  |
| Temperature Tolerance | -20° C to 60° C (-4° F to 140° F)  |